



Designed for safety. Built for fun.

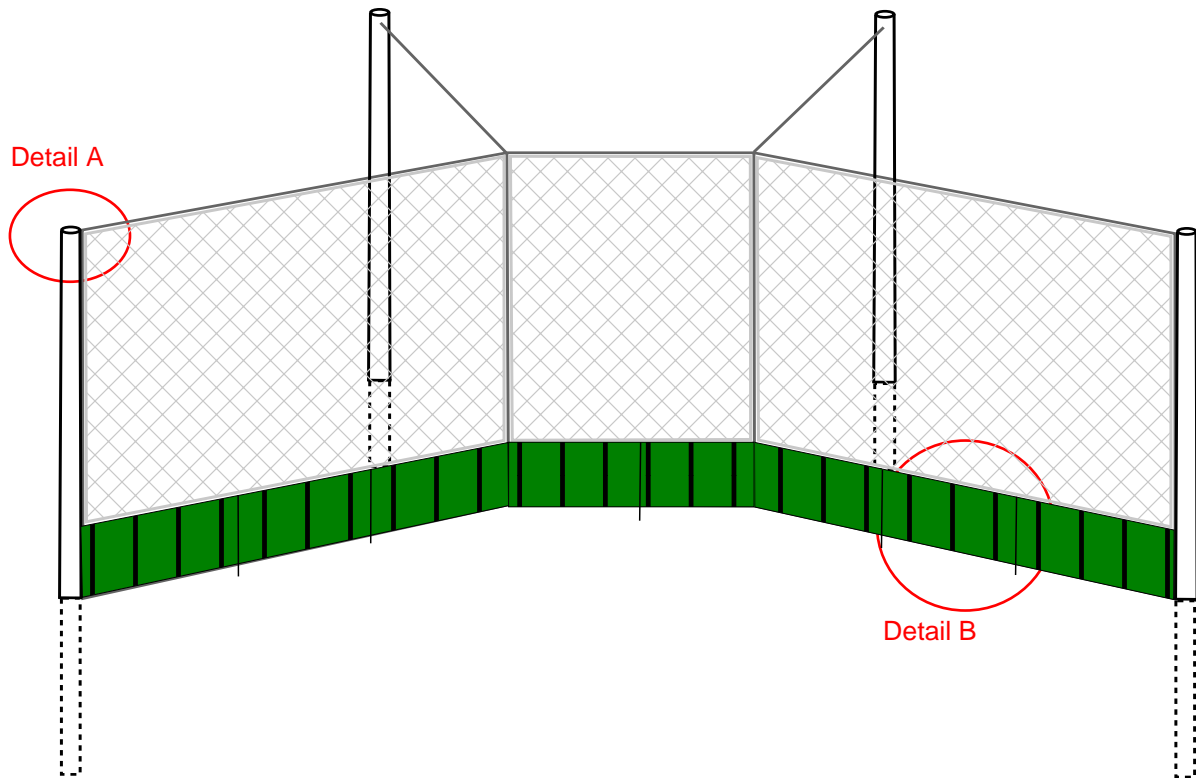


Additional Notes:

- Features steel poles with Stealth Black paint
- Pole sizes & footing based on soil conditions & wind loads
- Fusion wall posts set 4' OC max
- Drawings not to scale

Designed for safety. Built for fun.

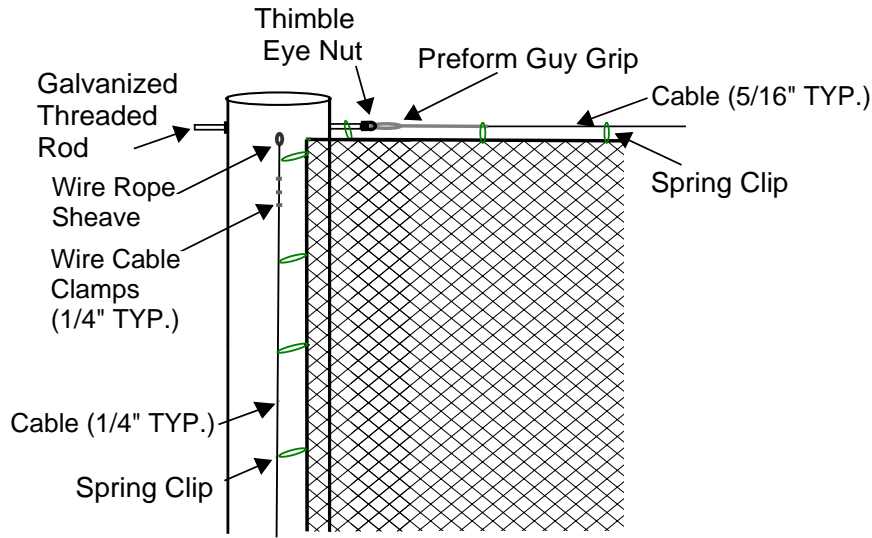


Detail A

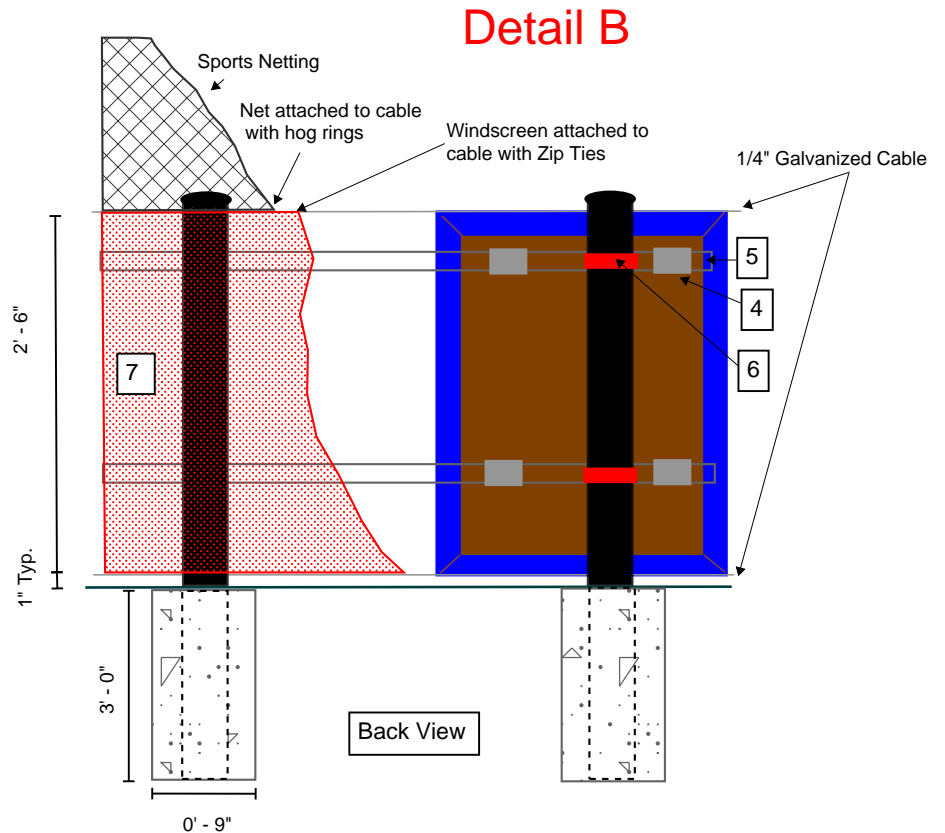

Detail B

Back View

Designed for safety. Built for fun.

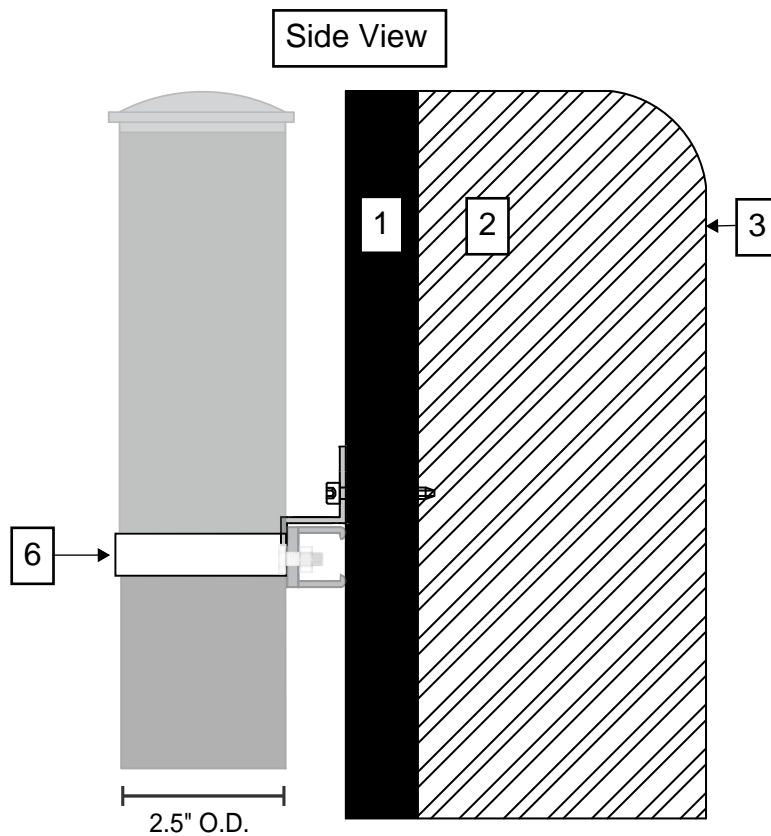

#1 - 3/4" Severe Weather AWPA compliant Treated Sheathing

- Primed & Painted with extreme conditions exterior paint.

#2 - 3" High Impact Foam

- Density: 1.50 pcf o
- Impression Load: 25% 75-85, 65% 128-145 Support Factor 65/25 1.7mm
- Rebound %: 40-48%
- Tear Resistance: 1.5 - 2.5 lbs/in
- Static Fatigue: <35% % Loss @ 25% ILD

#3 - Advantage MVP Vinyl

- 18.5ox/ sq yd
- 3000+ hour UV resistance
- Emboss: Course Matte
- Construction: 9 x 9, 1000 x 1000 Denier
- Tongue Tear: 100 x 100 lbs / 1"
- Grab Tensile: 375 x 375 lbs / 1"
- Adhesion: 26lbs / 2"
- Meets CAL117-2013 Flammability Test
- Abrasion: 1000 Cycles
- Rot, Mildew & Fungus Resistant
- Available in 18 Color Choices

#4 Zeus Clip

- Attached with 1" Galvanized Screw to Plywood
- Overlaps UNISTRUT between posts

#5 UNISTRUT


- 1 5/8" x 13/16" Slotted Standard
- 2 UNISTRUT's per pad

#6 - 2 Hole Pipe Strap


- Attached to UNISTRUT w/ Galvanized Bolt and Nut

#7 - Windscreen

- Privascreen windscreen can be hung from the back of system to conceal hardware.

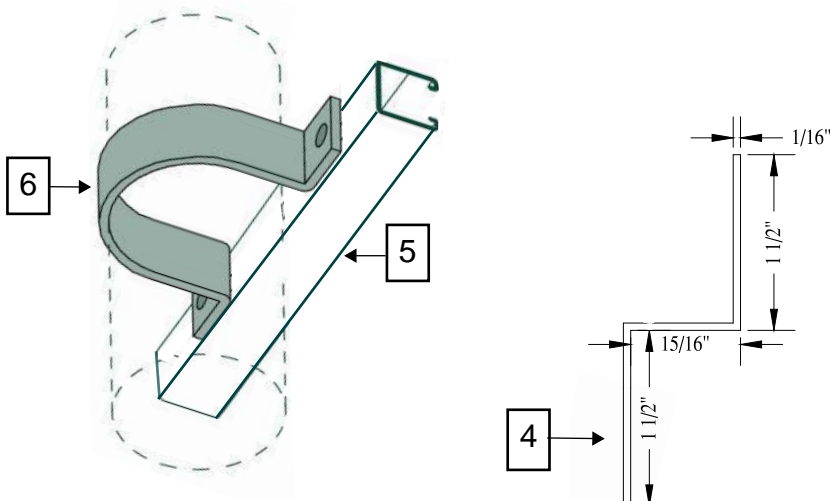

Designed for safety. Built for fun.

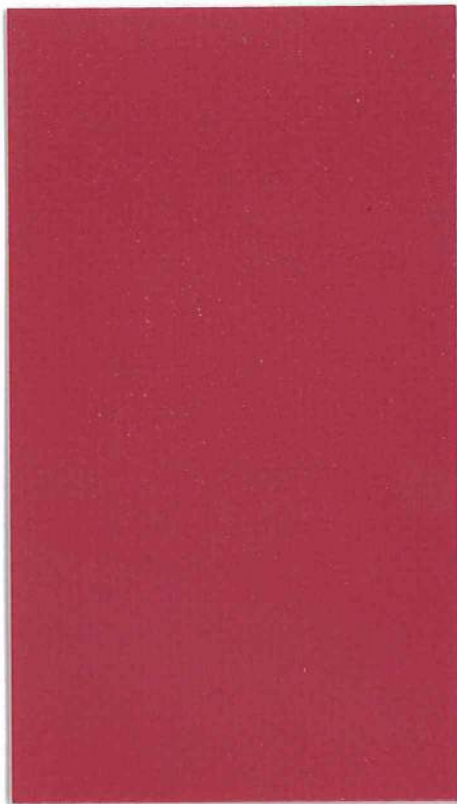

Scarlet Red



Black*

Navy*

True Blue



Regal Blue

Royal Blue*

Carolina Blue



Marine Blue

Forest Green

Green*



Lime Green

Purple

Maroon



Burgundy

Cardinal Red

Red*

Bright Pink

Brown*



Tan*

Orange*

Tangerine

Yellow*

Charcoal Grey*



Grey*

Steel Grey

Light Grey

White*

Designed for safety. Built for fun.

Ultra90 Specifications

COLORS

WHITE

RED

BROWN

GREY

NAVY

BLUE

TAN

ROYAL

BLUE

BLACK

GREEN



Material: High Density Knitted Polyethylene

Standard Heights: 3'8" (for 4' chain link) 5'8" (for 6' chain link) 7'8" (for 8' chain link)

Density: 90%

Weight: 5 oz/sq-yd (ASTM-D3776)

Tear Strength: Warp 51lbs/Fill 52lbs (ASTM-D 5587, Opt #1)

Breaking Strength: Warp 107lbs/Fill 125lbs (ASTM-D5034)

Bursting Strength: 202 psi (ASTM-D3786)

Thread: #135 Polyester

Hems: 3-ply reinforced with a polypropylene binding

Grommets: #2 brass grommets every 12" with triple grommeted corners

Grommet Strip: **Standard on Hts Over 8'*** #2 brass grommets every 24"

Limited Warranty 4 Years

Constructed with high density polyethylene for excellent outdoor longevity. It is also knitted, so if the material is cut or torn it will not unravel. Available in 3 different finishing options:

- **150' Rolls** – Extra polyethylene yarn is knitted into the top and bottom edges so Ultra 90 is ready to install right off the roll.
- **150' Plus Rolls** – Top and bottom edges are sewn with a double-stitch 3-ply hem and grommets every 12". The ends can be cut on site and folded over for reinforcement.
- **Custom** – All edges are sewn with a double- stitch, 3-ply hem and grommets every 12". Panels are custom cut to your specifications.